

Bandstand/Café


Assembly instructions/suggestions.

For any laser cut model we would suggest Deluxe Materials laser-cut wood glue AD-87. You can use something like UHU although it does not have a fine applicator point.


This model kit does not come with glazing, but if required, it can be cut from clear plastic packaging of suitable thickness. With any model it is best to test fit any parts prior to applying glue. A piece of fine sandpaper may be useful to clean up any edges if required.

(P) – indicates a suggested time to paint

1. Build the base. There are eight pairs of spacers that go around the edge of the base (A) which form the base supports.

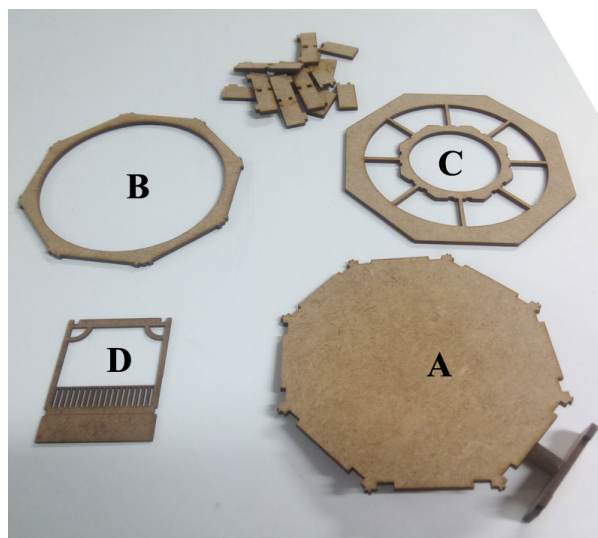

2. Layout your chosen side panels around the base and glue into position against the base. There will be a slight gap between the panels for which there are covers to fit later.
3. Make up any steps (step sections * 4 and side railings * 2) that go with the chosen panels i.e. the small personnel steps or the main entrance steps.
4. Glue the steps in the relevant places on the base assembly. (P)
5. If you have purchased the inner wall, first paint it and then install it. The wall is designed to go up against a solid panel or the offset personnel door panel.

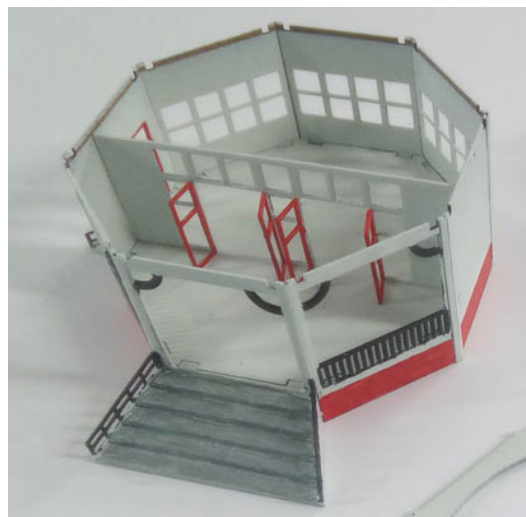

6. Glue on the inner roof panel (B).
7. Bend the top wall section at the fold lines and fit into part (C). It is advisable to put a piece of masking tape on the outside of the join and then run some glue down the inside of the join to stop it splaying later. (P)
8. Add the top ring piece.
9. Bend the sloping roof section and join with tape and glue as above. (P)
10. Glue the sloping roof section in place by gently sliding over the assembly made in 7 above.
11. Bend and glue the top of roof panel then glue in place.

